




HIGH SPEED UNIVERSAL BAG MAKING MACHINES

YÜKSEK HIZLI ÜNİVERSAL POŞET KESİM MAKİNALARI

FEATURES | ÖZELLİKLER

- Servo Motor and Invertor Control System.
- Bag Length, Set Number Can be Changed Via Screen. Bag Counting, Machine Speed Can be Seen on the Screen.
- There is One Photocell. Ability to Produce Printed Bags and None-Printed Bags.
- Ability to work with BOPP, OPP, PP, CPP, HDPE, LDPE Materials.
- The Machine Would Stop and Give Information on the Screen When, 'The Print Mark is Not In Right Position'.
- The Pneumatic Ballerina System With Motor and Invertor in Order to Unwind the Roll.
- The Synchronous Roller System.
- The Belt Motor Speed is Also Adjusted Via Invertor.
- The Rotating Lower Jaw is Included to the Machine as Standard.

- Servo Motor ve İnvörtör Sistemli
- Poşet Boyu, Poşet Sayısı Ekrandan Değiştirilir. Poşet Adedi Sayımı, Makine Hızı Ekrandan İzlenebilir.
- 1 adet fotosel bulunur. Baskılı ve Basksız Poşet Keser.
- BOPP, PP, OPP, CPP, Yüksek Yoğunluk Polietilen(HDPE), Alçak Yoğunluk Polietilen (LDPE) Poşetlerle Çalışabilme
- Baskı Doğru Yerde Olmadığında Makine Otomatik Olarak Durur ve Ekranda Bilgi Verir.
- Motorlu, Redüktörlü, İnvörtörlü ve Pnömatik Balerin Sistemli,
- Senkron Merdaneli
- Kayış Motoru Hızı İnvörtör ile Ayarlanır.
- Alt Çenede Döner Silikon Standart Özelliştir.

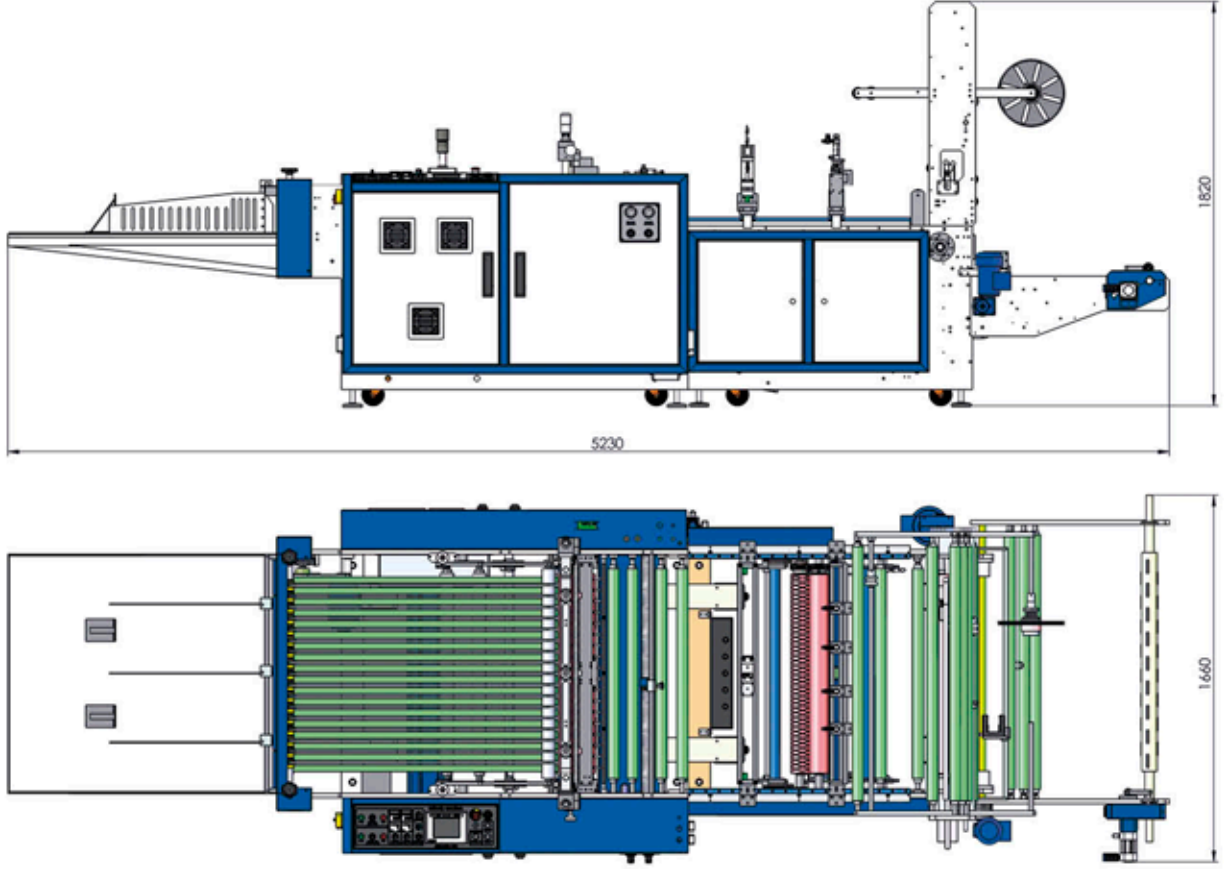


BAG TYPES | POŞET TİPLERİ

Standard | Standart



Optional | Opsiyonel

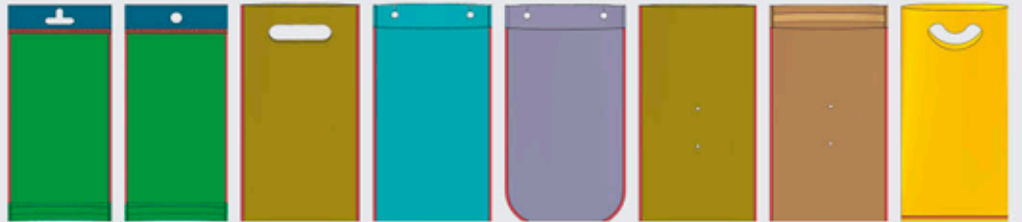

TECHNICAL SPECIFICATIONS | TEKNİK ÖZELLİKLER

		GM-600 SB	GM-700 SB	GM-900 SB	GM-1100 SB
Max. Bag Width (mm)	Maks. Poşet Geniřlięi (mm)	550	650	850	1050
Bag Length (mm)	Poşet Boyu (mm)	80 - 2000	80 - 2000	80 - 2000	80 - 2000
Thickness of Film (mm)	Film Kalınlıęı (mm)	0,020 - 0,100	0,020 - 0,100	0,020 - 0,100	0,020 - 0,100
Max. Production Speed (pieces/minute)	Maks. Üretim Hızı (adet/dakika)	200	200	180	150
Total Air Consumption (liter/minute)	Toplam Hava Tüketimi (litre/dakika)	150	150	200	200
Total Installed Power (kW)	Toplam Güç (kW)	9	9	9	9